

# **BFGoodrich Highway Control D2**

**A DRIVE TIRE DESIGNED TO PROVIDE LONG, EVEN WEAR AND FUEL EFFICIENCY TO KEEP YOUR FLEET UP AND RUNNING FOR THE LONG HAUL.**



**US: [bfgoodrichtrucktires.com](https://www.bfgoodrichtrucktires.com)**  
**Canada: <https://www.bfgoodrich.ca>**

**BFGoodrich**  
Tires

# BFGoodrich Highway Control D2



## GO THE DISTANCE

The BFGoodrich Highway Control D2 tire is a durable drive tire built for long tread life and dependable performance, designed to keep fleets running smoothly over the long haul.

### LONG TREAD LIFE

Expect long tread life and exceptional even wear performance.

- Designed to deliver more miles than the BFGoodrich DR444 tire.
- Proven tread pattern for long haul use.



### MULTIPLE RETREAD LIVES

Legendary BFGoodrich casing.

- Excellent retreadability
- Durability keeps you up and running.

## 5 YEAR<sup>(1)</sup>

5 Year / 2-Retread Manufacturer's Limited Casing Guarantee

Please visit our website for the more information.


## EVEN WEAR OVER THE LONG HAUL

If you are not completely satisfied with the BFGoodrich Highway Control D2 tire mileage performance in the first year or before 50% of its usable tread life – whichever comes first – we will reimburse 50% of your acquisition price per tire.<sup>(2)</sup>



### ALL SEASON CONFIDENCE

Proven, rugged tread pattern that delivers great traction.

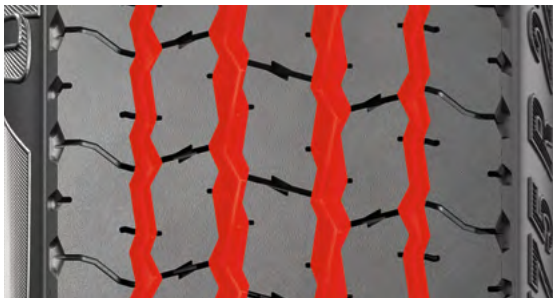

### FUEL EFFICIENCY

- 23% lower Rolling Resistance vs the BFGoodrich DR444 tire<sup>(3)</sup>



| Size        | Load Range | Catalog Number | Tread Depth (32nds) | Max. Speed (4) |      | Loaded Radius |     | Overall Diameter |      | Overall Width (5) |       | Approved Wheels (Measuring wheel listed first) | Min. Dual Spacing (5) |     | Revs Per Mile | Max Load Per Tire Single |     |      |     | Max Load Per Tire Dual |     |      |     |
|-------------|------------|----------------|---------------------|----------------|------|---------------|-----|------------------|------|-------------------|-------|------------------------------------------------|-----------------------|-----|---------------|--------------------------|-----|------|-----|------------------------|-----|------|-----|
|             |            |                |                     | mph            | km/h | in.           | mm. | in.              | mm.  | in.               | mm.   |                                                | in.                   | mm. |               | lbs.                     | psi | kg.  | kPa | lbs.                   | psi | kg.  | kPa |
| 11R22.5     | G          | 60170          | 27                  | 75             | 120  | 19.6          | 497 | 41.8             | 1062 | 11.2              | 284.3 | 8.25, 7.5                                      | 12.5                  | 318 | 495           | 6175                     | 105 | 2800 | 720 | 5840                   | 105 | 2650 | 720 |
| 11R22.5     | H          | 39386          | 27                  | 75             | 120  | 19.6          | 499 | 41.9             | 1064 | 11.2              | 285.4 | 8.25, 7.5                                      | 12.5                  | 318 | 494           | 6610                     | 120 | 3000 | 830 | 6005                   | 120 | 2725 | 830 |
| 295/75R22.5 | G          | 89967          | 27                  | 75             | 120  | 19.0          | 483 | 40.5             | 1030 | 11.3              | 286.2 | 8.25, 9.0                                      | 12.2                  | 311 | 510           | 6175                     | 110 | 2800 | 760 | 5675                   | 110 | 2575 | 760 |
| 11R24.5     | G          | 03099          | 27                  | 75             | 120  | 20.5          | 520 | 43.7             | 1110 | 11.2              | 283.3 | 8.25, 7.5                                      | 12.5                  | 318 | 473           | 6610                     | 105 | 3000 | 720 | 6005                   | 105 | 2725 | 720 |
| 11R24.5     | H          | 08992          | 27                  | 75             | 120  | 20.5          | 521 | 43.7             | 1111 | 11.2              | 284.8 | 8.25, 7.5                                      | 12.5                  | 318 | 473           | 7160                     | 120 | 3250 | 830 | 6610                   | 120 | 3000 | 830 |

Note: Wheel listed first is the measuring wheel.

(1) 5 Year / 2-Retread Limited Casing Guarantee when retreaded by an authorized Michelin Retread Technologies (MRT) Dealer or an Oliver Retread dealer. Please visit our website for the more information.

(2) For full list of terms and conditions, please visit our website.

(3) Based on internal rolling resistance tests using ISO 28580 test method comparing the BFGoodrich DR444 tire vs BFGoodrich Highway Control D2 tire in the 275/80R22.5 LRG size. Actual fuel saving results may vary, and may be impacted by many factors, to include road conditions, weather, environment, combination of steer and trailer tires used, driving habits, tire size, equipment and maintenance.

(4) Exceeding the lawful speed limit is neither recommended nor endorsed.

(5) Tire section widths and overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

BFGoodrich tires are subject to a continuous development program. BFGoodrich reserves the right to change product specifications at any time without notice or obligation.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect current Load and inflation information. Please visit our website for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits permission from the component manufacturer.

| Application | Highway | Regional | Urban   | Coach/Bus | On/Off-Road |
|-------------|---------|----------|---------|-----------|-------------|
|             |         |          |         |           |             |
| Position    | Steer   | Drive    | Trailer |           |             |
|             |         |          |         |           |             |

Recommended Application Acceptable Application

Michelin North America, Inc. | 1 Parkway S | Greenville, SC 29615  
Michelin North America (Canada), Inc. | 1001, De Maisonneuve Boulevard West, 10th Floor | Montreal, QC H3A 3C8  
© 2026 MNA, Inc. All rights reserved. (06/26) | © 2026 MNA(C) All rights reserved. (06/26)

» Take control today!

In the US: [bfgoodrichtrucktires.com](https://www.bfgoodrichtrucktires.com)

In Canada: <https://www.bfgoodrich.ca>

To Find Your Nearest BFGoodrich Commercial Truck Tire Dealer  
Call: United States, 1-877-788-8899; Canada, 1-888-871-6666

**BFGoodrich**  
Tires